

TRIMTECK®
OPTIMUX®

OpTB™ Trunnion Ball Valve
POB™ Process Optimizer Ball

TECHNICAL BROCHURE



OpTB™

Trunnion Ball Valve



INTRODUCTION

The Optimux **OpTB** Trunnion Ball Valve brings the legendary and well proven robustness and dependability of the trunnion ball design to process control applications, no longer limited to a full port option, but now being offered with our new **Process Optimizer Ball POB™** which delivers excellent flow characteristics and high flow coefficients (**Fig. 1**).

Our new **OpTB** with its efficient **POB™** design, delivers excellent rangeability and accurate control for pressure Classes 150 to 1500 while maintaining critical features such as fire-safe and metal-to-metal tight shutoff. The **OpTB** raises the bar to new levels not yet reached by traditional V-Notch ball valve manufacturers, typically limited to 600 pressure class.

The **OpTB** has been designed with flexibility in mind, the full bore ball (**Fig. 2**) is totally compatible and interchangeable with the new **POB™** (**Fig. 2**) within the same size and class valve, and with no additional valve components or special tooling required.

All these features make the **OpTB** an exceptional process control valve ideally suited for industrial services which require solutions for challenging abrasive, corrosive fluids, high temperatures and pressures.

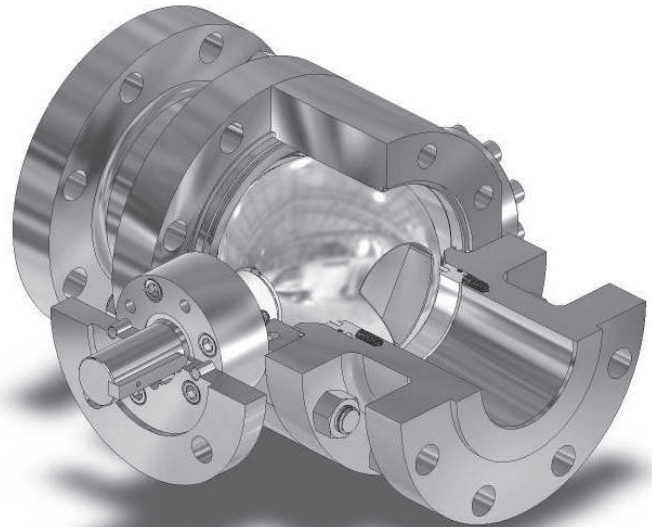


Figure 1
OpTB POB™ Process Optimizer Ball

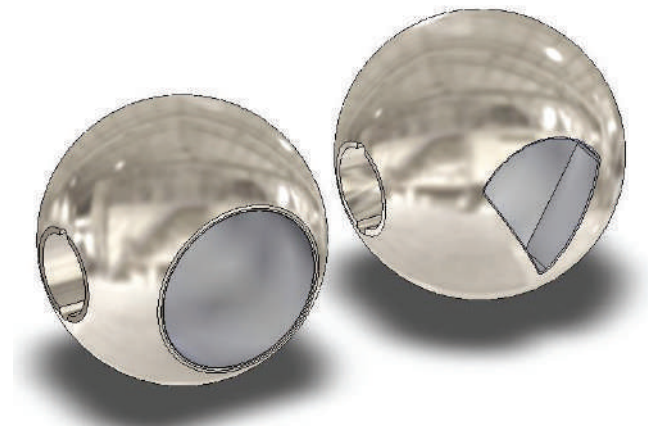


Figure 2
Full Bore & POB™ Balls

When the POB™ is used please refer to the flow coefficient Cv information shown in **Table 1** for proper selection

OpTB™

Trunnion Ball Valve

OS2T™ Optimizer Severe Service Trim

Our **OpTB** is also well equipped to withstand and manage the undesired effects of noise and cavitation in liquid fluids.

The **OS2T™** trim (**Fig. 3**), has been designed to reduce up to 25 dB of noise, as well as to eliminate the destructive effects of cavitation.

The unique design of the **OS2T™** drives the process fluid through a tortuous path consisting of a series of orifices and back channels which remove kinetic energy and lower fluid pressure,

There are several application-specific **OS2T™** trims available to handle any given fluid dynamics condition. Our application engineers will carefully evaluate your process data as to be able to choose the optimal solution.

The **OS2T™** trims have been designed to work inside the core of the **Control Optimizer Ball COP™** itself, so that the fluid characterization, as well as the noise, and cavitation abatement occurs simultaneously within the core of the ball, and not delayed upstream or downstream, where these undesired effects can damage the valve internal components.

Noise or cavitation baffles inserted upstream or downstream of valve bodies or on pipelines have been used extensively in the past, however they have proven to be less effective, especially when handling flow conditions exhibiting high noise, and cavitation.

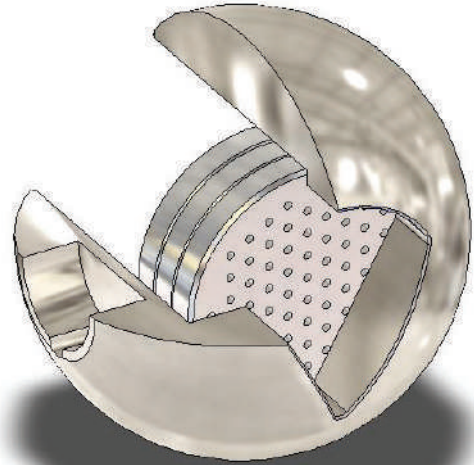


Figure 3
OpTB OS2T™
Optimizer Severe Service Trim

Typical industry applications include compressor surge control taking advantage of the high rangeability and capacity of the **OpTB™**. High pressures and temperatures associated with steam production from geothermal wells mixed with sand are comfortably controlled with the **POB™** specially when hardened with **CVD-5B™**. Feed gas regulation applications such as gas-to-flare are ideally suited for the **OpTB™** because of its exceptional tight shutoff characteristics.

In general, the **OpTB™** will be one of the best choices for challenging process control applications such as multiphase fluids and light to medium slurries like those found in oil sands, mining and pulp and paper fluids.



OpTB™

Features and Advantages

- ***Rugged well proven three-piece trunnion design***
- ***Conforms to API 6D Standard***
- ***Fire-Safe tested to API 607***
- ***Lower operating torques for smooth operation while reducing actuator cost***
- ***Ball mechanical tolerances 0.0009” and 4 RMS mirror finish***
- ***Meets NACE MR01.75 Standards for sour applications***
- ***POB™ alternative offers precise flow characterization for accurate control, pressure class 150 to 1500***
- ***The POB™ design allows the control of fluids with a rangeability superior to 300:1***
- ***Our standard Full Bore Ball and the POB™ are fully interchangeable within same size and class body without any additional components***
- ***Spring loaded seat rings for positive sealing***
- ***Designed for a broad spectrum of on-off, or control application in the Oil & Gas, Chemical, Petrochemical, Geo-Thermal Power Generation, and a large variety of industrial slurries under high pressures and temperatures.***
- ***Noise abatement and anti-cavitation severe service OS2T™ trims available***

Technical Specifications

| Design Reference | API | ASME |
|-------------------------|----------------|--------------------------|
| Design Standard | API 6D | ASME B16.34 |
| Flange Ends | | ASME B 16.47 ASME B 16.5 |
| Buttweld Ends | | ASME B 16.25 |
| Test & Inspection | API 6D API 598 | |
| Fire-safe | API 607 | |

OpTB™

Trunnion Ball Valve

| POB™ Flow Coefficients Cvs | | | | | | | | | | |
|-----------------------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|--------|
| Cv versus Percent Opening | | | | | | | | | | |
| Size Inch | 100 | 90 | 80 | 70 | 60 | 50 | 40 | 30 | 20 | 10 |
| 2 | 112 | 89 | 62 | 44 | 29 | 19 | 12 | 9 | 2 | 0.17 |
| 3 | 285 | 244 | 182 | 130 | 85 | 57 | 32.5 | 15.1 | 4.5 | 0.4 |
| 4 | 470 | 394 | 294 | 200 | 127 | 76 | 40 | 17.2 | 7.5 | 1.4 |
| 5 | 525 | 418 | 384 | 316 | 283 | 159 | 86 | 54.8 | 19.3 | 2.3 |
| 6 | 894 | 809 | 641 | 467 | 324 | 209 | 130 | 70.3 | 27.8 | 4.3 |
| 8 | 1,479 | 1,281 | 993 | 721 | 498 | 335 | 196.8 | 101.5 | 40.2 | 5.5 |
| 10 | 3,524 | 2,786 | 2,300 | 1,764 | 1,261 | 870 | 615.6 | 345.6 | 204.7 | 87.5 |
| 12 | 4,482 | 3,413 | 2,835 | 2,257 | 1,609 | 1,090 | 697.6 | 432.5 | 257.6 | 113.4 |
| 14 | 5,123 | 4,753 | 4,288 | 2,985 | 2,125 | 1,324 | 983.3 | 572.2 | 389.5 | 154.3 |
| 16 | 7,597 | 5,914 | 5,050 | 3,885 | 2,786 | 1,880 | 1,231 | 763.3 | 475.2 | 199.6 |
| 18 | 9,116 | 7,392 | 6,565 | 4,856 | 3,621 | 2,256 | 1,538 | 954.5 | 594.8 | 259.5 |
| 20 | 10,939 | 8,870 | 8,206 | 6,312 | 4,526 | 2,933 | 1,845 | 1,240 | 773.2 | 324.3 |
| 24 | 14,220 | 10,644 | 10,011 | 7,748 | 5,748 | 3,813 | 2,195 | 1,587 | 966.5 | 395.64 |

Table 1

| OpTB™ Full Port Flow Coefficients Cvs | | | |
|--|---------|---------|--------|
| Cvs Shown at 90° Opening | | | |
| Size Inch | CL150 | CL300 | CL600 |
| 2 | 500 | 430 | 370 |
| 3 | 1,360 | 1,100 | 1,020 |
| 4 | 2,500 | 2,000 | 1,850 |
| 6 | 5,300 | 5,250 | 4,400 |
| 8 | 10,750 | 10,100 | 8,450 |
| 10 | 17,500 | 16,820 | 14,250 |
| 12 | 26,750 | 25,950 | 22,550 |
| 14 | 31,850 | 30,900 | 28,500 |
| 16 | 44,000 | 42,600 | 38,150 |
| 18 | 58,000 | 55,870 | 51,150 |
| 20 | 75,500 | 72,500 | 68,500 |
| 22 | 91,770 | 86,850 | 80,150 |
| 24 | 113,400 | 109,340 | 98,860 |

Table 2

Cvs information for CL900 and CL1500 available on request.

CVs Values for reduced bore available on request.

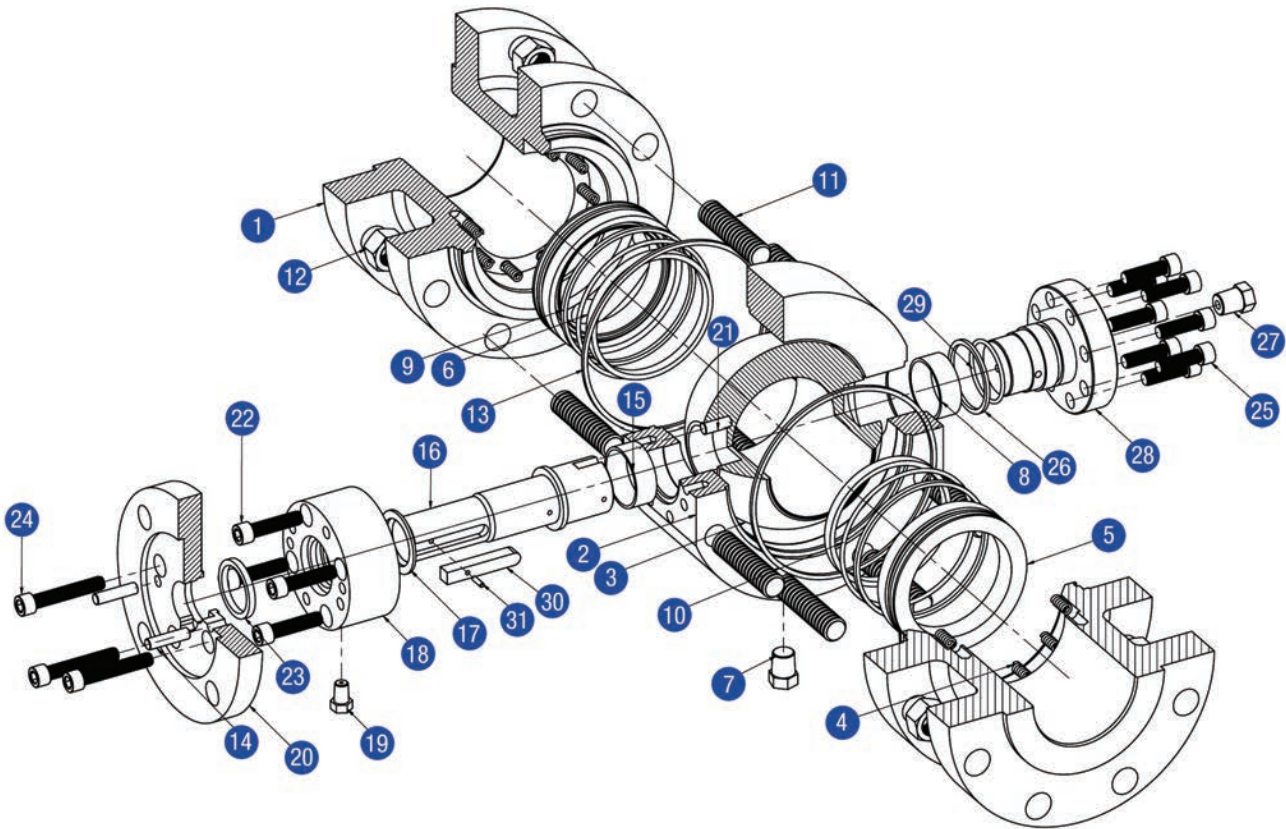


Figure 4: Exploded View of Body Sub-Assembly

| Materials List | | | |
|-----------------------|----------------------|--------------------------|------------------------|
| Item | Description | Carbon Steel/NACE | Stainless Steel |
| 1 | Flange | ASTM A105 | ASTM A182-F316 |
| 2 | Body | ASTM A105 | ASTM A182-F316 |
| 3 | Ball | ASTM A105/ENP-CVD-5B | ASTM A182-F316/ CVD-5B |
| 4 | Seat Spring | Inconel X-750 | Inconel X-750 |
| 5 | Seat Ring | ASTM A105/ENP-CVD-5B | ASTM A182-F316/CVD-5B |
| 6 | Seat Insert | 25% Glass Filled PTFE | 25% Glass Filled PTFE |
| 7 | Plug Drain | 316 SS | 316 SS |
| 8 | Bearing | 316SS/PTFE/MoS2 | 316SS/PTFE/MoS2 |
| 9 | Firesafe Seal Gasket | 316SS/Graphite | 316SS/Graphite |
| 10 | O-ring | NBR | NBR |
| 11 | Body Stud | ASTM A193-B7 | ASTM A193-B8 |
| 12 | Body Nut | ASTM A194-2H | ASTM A194-8 |
| 13 | Seal Gasket | 316SS/Graphite | 316SS/Graphite |
| 14 | Gland Pin | Carbon Steel | 316 SS |
| 15 | Bearing | 316SS/PTFE/MoS2 | 316SS/PTFE/MoS2 |
| 16 | Stem | ASTM A105/ENP | ASTM A182-F316 |
| 17 | Stem Gasket | 316SS/Graphite | 316SS/Graphite |
| 18 | Packing Box | ASTM A105 | ASTM A182-F316 |
| 19 | Stem Injection | Assembly | Assembly |
| 20 | Top Flange | ASTM A105 | ASTM A182-F316 |
| 21 | Pin | 316 SS | 316 SS |
| 22 | Packing Box Screw | Carbon Steel | 316 SS |
| 23 | Packing | 316SS/Graphite | 316SS/Graphite |
| 24 | Flange Screw | Carbon Steel | 316 SS |
| 25 | Trunnion Plate Screw | Carbon Steel | 316 SS |
| 26 | Trunnion Gasket | 316SS/Graphite | 316SS/Graphite |
| 27 | Bleed Valve | Assembly | Assembly |
| 28 | Trunnion Plate | ASTM A216-WCB/ENP | ASTM A351-CF8M |
| 29 | O-Ring | NBR | NBR |
| 30 | Key | Carbon Steel | 316 SS |
| 31 | Key Pin | Carbon Steel | 316 SS |

Table 3

- Notes: 1. All NACE materials comply with MR01.75.99
 2. Alternative materials are also available for all of the components listed



OpTB™

Trunnion Ball Valve

| OpTB Design Operating Torque | | | | | |
|-------------------------------------|--------------|--------------|--------------|--------------|---------------|
| Stem Torque Ft. Lbs | | | | | |
| Size Inch | CL150 | CL300 | CL600 | CL900 | CL1500 |
| 2 | 36 | 64 | 108 | 152 | 241 |
| 3 | 44 | 81 | 140 | 199 | 318 |
| 4 | 111 | 197 | 338 | 479 | 761 |
| 6 | 232 | 398 | 669 | 940 | 1,483 |
| 8 | 751 | 1,183 | 1,886 | 2,589 | 3,999 |
| 10 | 798 | 1,349 | 2,244 | 3,139 | 4,936 |
| 12 | 1,149 | 1,918 | 3,169 | 4,419 | 6,929 |
| 14 | 1,786 | 3,128 | 5,312 | 7,495 | 11,876 |
| 16 | 2,224 | 3,944 | 6,741 | 9,538 | 15,152 |
| 18 | 3,370 | 5,878 | 9,955 | 14,032 | 22,215 |
| 20 | 4,433 | 7,795 | 13,264 | 18,732 | 29,706 |
| 22 | 5,113 | 8,953 | 15,199 | 21,444 | 33,978 |
| 24 | 7,163 | 12,713 | 21,741 | 30,769 | 48,886 |
| 26 | 8,812 | 15,000 | 25,064 | 35,128 | |
| 28 | 10,702 | 18,487 | 31,145 | 43,810 | |
| 30 | 13,264 | 23,324 | 39,685 | 56,047 | |
| 32 | 15,742 | 27,681 | 47,099 | 66,516 | |
| 34 | 18,702 | 31,719 | 52,891 | 74,062 | |
| 36 | 24,465 | 41,545 | 69,325 | 97,105 | |
| 40 | 31,646 | 53,795 | 89,818 | | |
| 42 | 37,431 | 63,730 | 106,503 | | |
| 48 | 49,362 | 84,028 | 140,409 | | |

Table 4

- Notes:
1. Torques shown on this table are used as a guide for actuator selection. A safety factor of 1.3 - 1.5 times is recommended for actuator sizing.
 2. Torques may change according to different mediums and trim materials

OpTB™
Trunnion Ball Valve

Manual Actuators

For on/off applications, and in addition to a broad selection of automatic actuators, the OpTB can be fitted with hand levers or worm gear actuators with hand wheel.

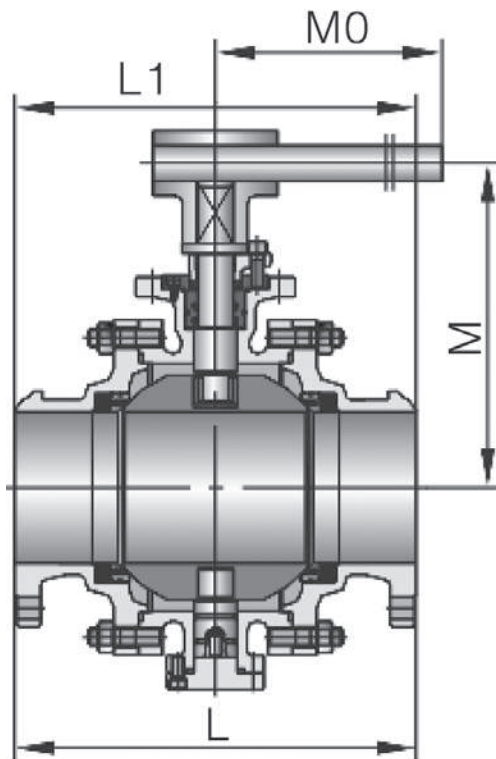


Figure 5
Hand Operated

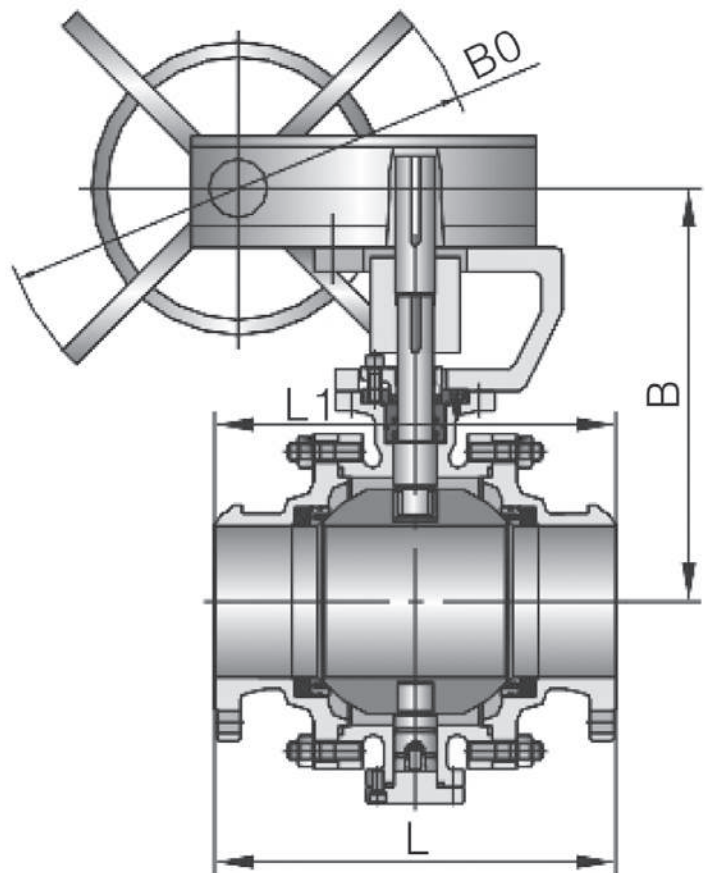


Figure 6
Worm Gear Actuator



OpTB™

Trunnion Ball Valve

**Cast & Forged Steel Trunnion Ball Valve
Valve Weight & Dimensions – Class 150**

| Size Inch | Flange | Butt Weld | Hand operated | | Worm Gear Act. | | Weight Lbs |
|--------------|--------|-----------|---------------|------|----------------|------|---------------|
| | L | Li | M | Mo | B | Bo | Flanged |
| 2 | 7.0 | 8.5 | 4.7 | 9.0 | - | - | 66 |
| 3 | 8.0 | 11.0 | 6.0 | 15.7 | - | - | 132 |
| 4 | 9.0 | 12.0 | 7.0 | 25.6 | - | - | 202 |
| 5 | 14.0 | 15.0 | 11.8 | 41.3 | - | - | 325 |
| 6 | 15.5 | 18.0 | 13.0 | 41.3 | - | - | 418 |
| 8 | 18.0 | 20.5 | - | - | 15.7 | 23.6 | 759 |
| 10 | 21.0 | 22.0 | - | - | 19.5 | 23.6 | 1,089 |
| 12 | 24.0 | 25.0 | - | - | 22.8 | 31.5 | 1,551 |
| 14 | 27.0 | 30.0 | - | - | 26.6 | 31.5 | 1,889 |
| 16 | 30.0 | 33.0 | - | - | 26.4 | 31.5 | 2,244 |
| 18 | 34.0 | 36.0 | - | - | 27.5 | 31.5 | 3,168 |
| 20 | 36.0 | 39.0 | - | - | 33.0 | 31.5 | 4,219 |
| 24 | 42.0 | 45.0 | - | - | 41.3 | 31.5 | 6,166 |
| 28 | 49.0 | 53.0 | - | - | 43.3 | 31.5 | 8,899 |
| 32 | 54.0 | 60.0 | - | - | 45.3 | 31.5 | 12,078 |
| 36 | 60.0 | 68.0 | - | - | 48.4 | 31.5 | 16,753 |
| 40 | 67.8 | 76.0 | - | - | 52.0 | 31.5 | 22,596 |

Table 5

OpTB™

Trunnion Ball Valve

| Cast & Forged Steel Trunnion Ball Valve Valve Weight & Dimensions – Class 300 | | | | | | | |
|--|--------|-----------|---------------|------|----------------|------|---------------|
| | Flange | Butt Weld | Hand Operated | | Worm Gear Act. | | Weight Lbs |
| Size Inch | L | Li | M | Mo | B | Bo | Flanged |
| 2 | 8.5 | 8.5 | 4.2 | 9.0 | - | - | 68 |
| 3 | 11.1 | 11.0 | 6.0 | 15.7 | - | - | 152 |
| 4 | 12.0 | 12.0 | 7.0 | 25.6 | - | - | 244 |
| 5 | 15.0 | 15.0 | 12.0 | 41.3 | - | - | 386 |
| 6 | 15.8 | 15.9 | 13.0 | 41.3 | - | - | 464 |
| 8 | 19.8 | 20.5 | - | - | 15.7 | 23.6 | 827 |
| 10 | 22.4 | 22.0 | - | - | 19.5 | 23.6 | 1,188 |
| 12 | 25.5 | 25.0 | - | - | 22.8 | 31.5 | 1,678 |
| 14 | 33.0 | 30.0 | - | - | 24.6 | 31.5 | 1,980 |
| 16 | 33.0 | 33.0 | - | - | 26.4 | 31.5 | 2,860 |
| 18 | 36.0 | 36.0 | - | - | 27.5 | 31.5 | 3,773 |
| 20 | 39.0 | 39.0 | - | - | 33.0 | 31.5 | 4,598 |
| 24 | 45.0 | 45.0 | - | - | 41.3 | 31.5 | 6,358 |
| 28 | 53.0 | 60.0 | - | - | 43.3 | 31.5 | 10,065 |
| 32 | 60.0 | 60.0 | - | - | 45.3 | 31.5 | 13,728 |
| 36 | 68.0 | 68.0 | - | - | 48.4 | 31.5 | 18,557 |
| 40 | 82.0 | 82.0 | - | - | 52.0 | 31.5 | 24,640 |

Table 6



OpTB™

Trunnion Ball Valve

**Cast & Forged Steel Trunnion Ball Valve
Valve Weight & Dimensions – Class 600**

| Size Inch | Flange | Butt Weld | Hand Operated | | Worm Gear Act. | | Weight Lbs |
|--------------|--------|-----------|---------------|------|----------------|------|---------------|
| | L | Li | M | Mo | B | Bo | Flanged |
| 2 | 11.5 | 11.5 | 4.3 | 25.6 | - | - | 99 |
| 3 | 14.0 | 14.0 | 7.8 | 25.6 | - | - | 176 |
| 4 | 17.0 | 17.0 | - | - | 9.2 | 23.6 | 330 |
| 6 | 22.0 | 22.0 | - | - | 11.8 | 31.5 | 545 |
| 8 | 26.0 | 26.0 | - | - | 14.8 | 31.5 | 963 |
| 10 | 31.0 | 31.0 | - | - | 17.5 | 31.5 | 1,375 |
| 12 | 33.0 | 33.0 | - | - | 20.3 | 31.5 | 1,542 |
| 14 | 35.0 | 35.0 | - | - | 21.6 | 31.5 | 2,706 |
| 16 | 39.0 | 39.0 | - | - | 24.2 | 31.5 | 3,377 |
| 18 | 43.0 | 43.0 | - | - | 29.5 | 31.5 | 4,697 |
| 20 | 47.0 | 47.0 | - | - | 31.9 | 31.5 | 5,808 |
| 24 | 55.0 | 55.0 | - | - | 41.3 | 31.5 | 8,712 |
| 28 | 61.0 | 61.0 | - | - | 46.4 | 31.5 | 13,332 |
| 32 | 70.0 | 70.0 | - | - | 49.2 | 31.5 | 17,215 |
| 36 | 82.0 | 82.0 | - | - | 51.7 | 31.5 | 23,430 |
| 40 | 92.0 | 92.0 | - | - | 56.0 | 31.5 | 32,340 |

Table 7

OpTB™

Trunnion Ball Valve

| Cast & Forged Steel Trunnion Ball Valve Valve Weight & Dimensions – Class 900 | | | | | | | |
|--|--------|-----------|---------------|------|----------------|------|---------------|
| | Flange | Butt Weld | Hand Operated | | Worm Gear Act. | | Weight Lbs |
| Size Inch | L | Li | M | Mo | B | Bo | Flanged |
| 2 | 14.5 | 14.5 | 8.6 | 25.6 | - | - | 114 |
| 3 | 15.0 | 15.0 | 10.2 | 25.6 | - | - | 191 |
| 4 | 18.0 | 18.0 | - | - | 11.8 | 23.6 | 352 |
| 6 | 24.0 | 24.0 | - | - | 14.4 | 31.5 | 847 |
| 8 | 29.0 | 29.0 | - | - | 15.5 | 31.5 | 1,120 |
| 10 | 33.0 | 33.0 | - | - | 19.9 | 31.5 | 1,804 |
| 12 | 38.0 | 38.0 | - | - | 22.6 | 31.5 | 2,475 |
| 14 | 40.5 | 40.5 | - | - | 26.5 | 31.5 | 3,542 |
| 16 | 44.5 | 44.5 | - | - | 30.1 | 31.5 | 4,422 |
| 18 | 48.0 | 48.0 | - | - | 34.3 | 31.5 | 6,182 |
| 20 | 52.0 | 52.0 | - | - | 35.2 | 31.5 | 7,612 |
| 24 | 61.0 | 61.0 | - | - | 37.8 | 31.5 | 12,093 |
| 28 | 70.0 | 67.0 | - | - | 47.6 | 31.5 | 22,444 |
| 32 | 80.7 | 70.0 | - | - | 50.8 | 39.4 | 26,622 |

Table 8



OpTB™

Trunnion Ball Valve

**Cast & Forged Steel Trunnion Ball Valve
Valve Weight & Dimensions – Class 1500**

| Size Inch | Flange | Butt Weld | Hand Operated | | Worm Gear Act. | | Weight Lbs |
|--------------|--------|-----------|---------------|------|----------------|------|---------------|
| | L | Li | M | Mo | B | Bo | Flanged |
| 2 | 14.5 | 14.5 | 8.7 | 25.6 | 8.7 | 23.6 | 132 |
| 3 | 18.5 | 18.5 | 10.3 | 25.6 | 10.3 | 23.6 | 253 |
| 4 | 21.5 | 21.5 | - | - | 11.8 | 23.6 | 427 |
| 6 | 27.7 | 27.7 | - | - | 14.4 | 31.5 | 1,276 |
| 8 | 32.7 | 32.7 | - | - | 18.7 | 31.5 | 1,654 |
| 10 | 39.0 | 39.0 | - | - | 22.8 | 31.5 | 2,626 |
| 12 | 44.5 | 44.5 | - | - | 27.5 | 31.5 | 4,774 |
| 14 | 49.5 | 49.5 | - | - | 30.0 | 31.5 | 4,950 |
| 16 | 54.5 | 55.3 | - | - | 32.8 | 31.5 | 6,072 |

Table 9

OpTB™

Rotary Actuators, Features and Characteristics

RPA Rack and Pinion Actuators

Optimux's Series RPA actuators are compact, allow for field reversibility, provide adequate torque for most standard applications and are easy to maintain. RPA actuators are designed for extremely long cycle life when utilized in normal loading applications. The RPA actuators will take service temperatures of -10° to 275° F (-23° to 135° C).



Figure 7: RPA Rack and Pinion Actuator

| Double Acting Torque Values (in. Lbs) | | | | | |
|--|-------|-------|-------|--------|--------|
| PSI | 40 | 60 | 80 | 100 | 120 |
| RPA052 | 263 | 395 | 526 | 658 | 789 |
| RPA148 | 740 | 1,109 | 1,479 | 1,849 | 2,219 |
| RPA222 | 1,109 | 1,664 | 2,218 | 2,773 | 3,327 |
| RPA470 | 2,071 | 3,106 | 4,142 | 5,177 | 6,213 |
| RPA900 | 4,550 | 6,825 | 9,100 | 11,375 | 13,650 |

Table 10

* Other model numbers and torque options are also available

Optimux® HPP4000 Smart Valve Positioners

Our new HPP4000 brings to the market all the field proven attributes of our former HPP3000 plus all the additional features our users have requested for the past few years: LCD Display, 4-20mA feedback signal, HART® communication protocol and Auxiliary Limit Switches, all of these within our legendary and well proven robust enclosure capable of sustaining the most rigorous industrial plant conditions.

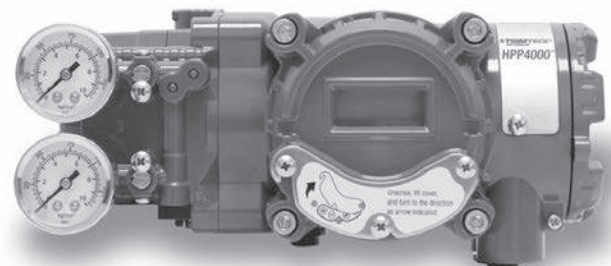


Figure 8: HPP4000 Digital Series

But this is not all, the HPP4000 was designed to accurately position your control valve and to operate it efficiently at the lowest possible air consumption (LPM) bellow 3 LPM @ 100 psi.

Optimux® HPP4500 Smart Valve Positioners

Our new HPP4500 microprocessor equipped, current-to-pneumatic digital positioner is a reliable, accurate and robust positioner which offers as a standard many features and technical characteristics traditionally offered as options by other digital positioner's manufacturers.



Figure 9: HPP4500 Digital Series

The HPP4500 offers as a standard, Hart® communication, 4-20mA Feedback Signal and a LCD display.

OpTB™

Trunnion Ball Valve

The information and specifications described in this brochure are considered accurate, however they are intended for information purpose only and should not be considered as certified information.

Considering that Optimux products are continuously improved and upgraded, specifications, dimensions, and information described herein are subject to change without notice.

For further information or verification, consult your Optimux representative. Specific instructions for the installation, operation, troubleshooting and maintenance of the OpTB control valves are contained on the OpTB Maintenance Bulletin.

Inconel are trade mark of Huntington Ally
Teflon is a trade mark of E. I. DuPont Company
CVD/5B is a trademark of Trimteck

For more information, visit our website at www.trimteck.com

