




# EMERGENCY RELIEF VENT

## MODEL 2100

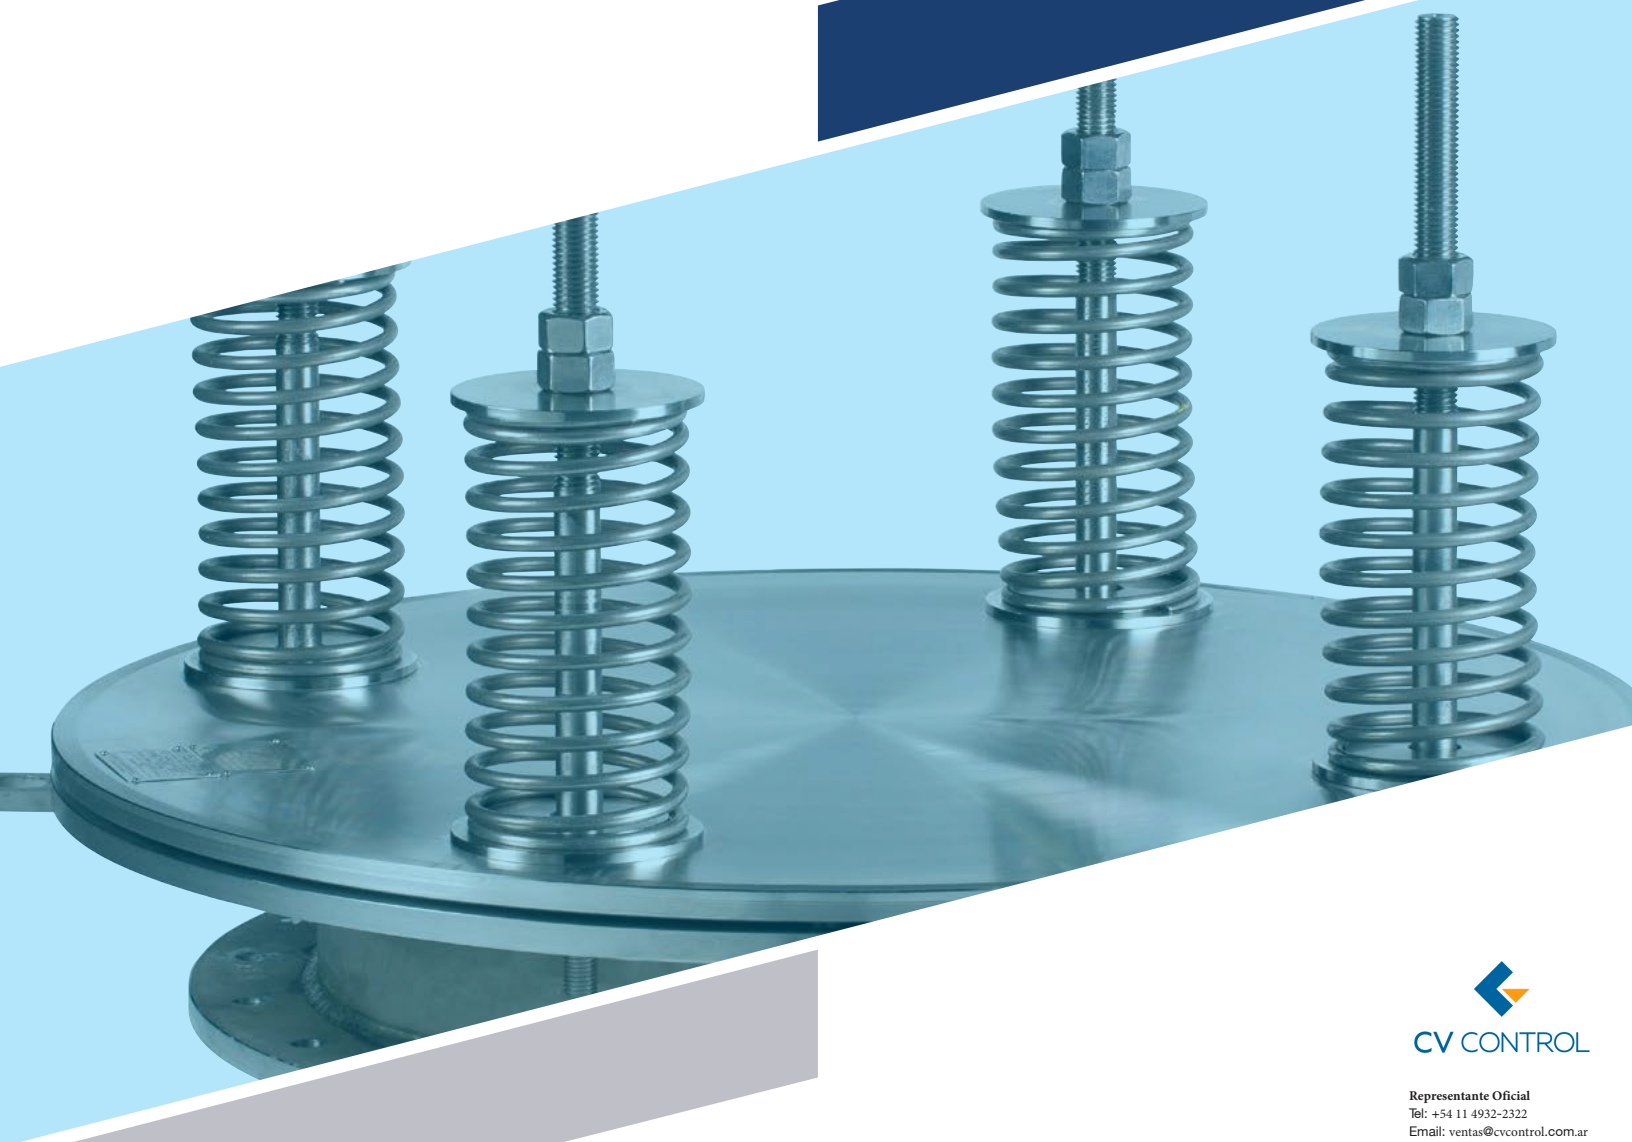

Representante Oficial  
Tel: +54 11 4932-2322  
Email: [ventas@cvcontrol.com.ar](mailto:ventas@cvcontrol.com.ar)  
[www.cvcontrol.com.ar](http://www.cvcontrol.com.ar)

# MODEL 2100

The Groth Model 2100 is designed to provide emergency relief capacity beyond that furnished by the normal operating pressure relief valve on the tank. The valve protects the tank against rupture or explosion that could result from excessive internal pressure. Model 2100 relieves, then reseats when the overpressure event has been dissipated.

## Technical Details

- Sizes: 16" (DN 400) , 20" (DN 500) and 24" (DN 600)
- Pressure Settings: 1 to 15 psig (68.9 mbarg to 1.03 barg)
- Materials: Carbon Steel, Stainless Steel, special materials upon request
- ATEX Approved

## Features

- Easy access manway combined with emergency relief
- Independently adjustable springs keep the valve tightly sealed
- FKM seating ensures a tight seal

## Options

- Steam Jacket
- Buna-N, Fluoropolymer, FKM
- ANSI 150# and API 650 drilling classes



Representante Oficial  
Tel: +54 11 4932-2322  
Email: [ventas@cvcontrol.com.ar](mailto:ventas@cvcontrol.com.ar)  
[www.cvcontrol.com.ar](http://www.cvcontrol.com.ar)

[GROTHCORP.COM](http://GROTHCORP.COM)